

IAME

M1 60CC - PULL START

60cc Engine – Pull Start – TILLOTSON EQUIPPED


P.N. CP-CEA00110BC5

Technical Features:

- Engine Type: OTTO / 2-Stroke Mono-cylinder
- Bore: Ø41.80 (Ø42.00 max)
- Stroke: 43.30mm
- Displacement : 59.42cc (60.00cc max)
- Max. power: 2.0 Hp at 6.500 RPM
- Max. torque: 2.5 Nm at 6.000 RPM
- Inlet System: Piston Port
- Lubrication: Fuel / Oil Mixture 3%
- Ignition: Analogical
- Starting: Pull start
- Clutch : 3-mass Centrifugal Dry
- Max. Clutch engagement : 4.000 RPM

Air cooled and complete with:

- Analogical ignition with H.T. coil
- Pull start
- Kill switch
- NGK BR 9 EG spark-plug and cap
- Centrifugal clutch assembly with Z10 fixed sprocket (also available Z11)
- TILLOTSON Carburettor HS-323A
- Inlet silencer box
- Cylinder and cylinder head cover
- Exhaust manifold spacer
- Exhaust "box" muffler with cover

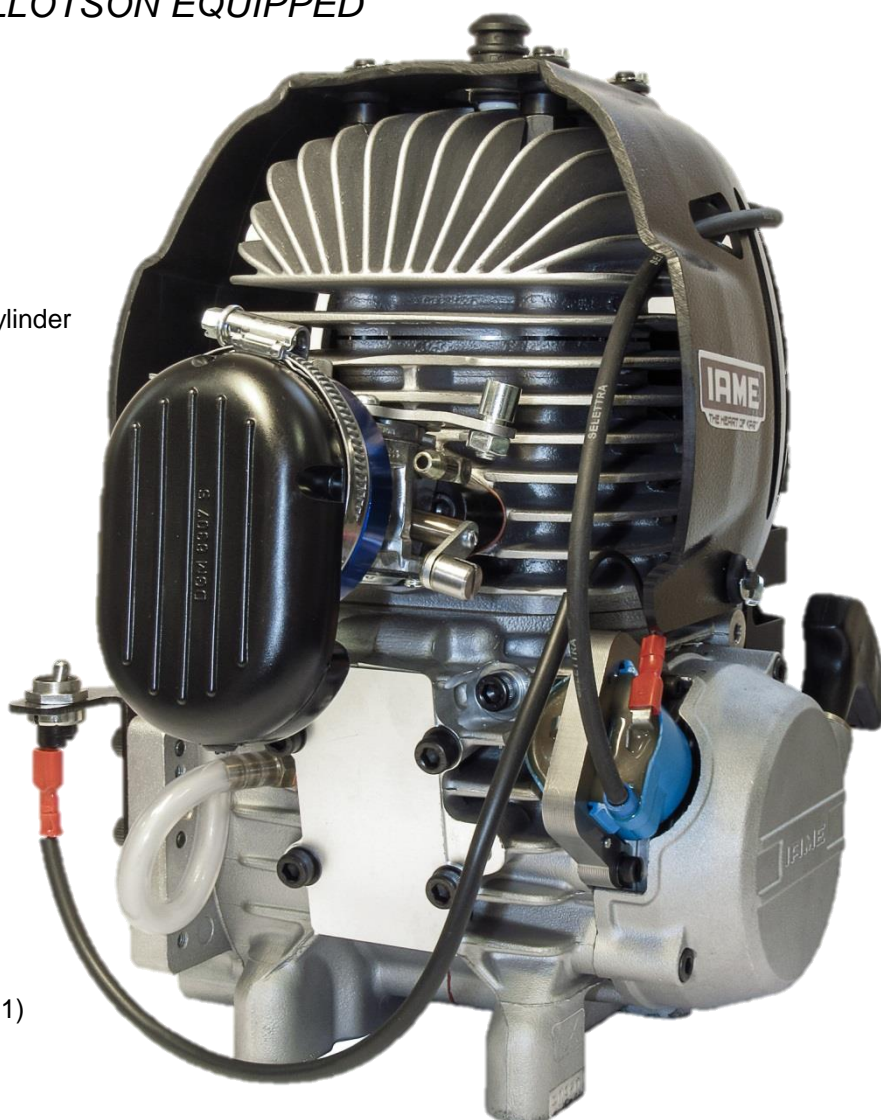

Engine weight complete with exhaust system (including all auxiliaries): 10.5 kg



IAME S.p.A S.U - via Lisbona, 15 - 24040 Zingonia (BG) - Italy - COD. CEE IT 01254850165
Tel. +39 035883022 - Fax: +39 035 885744 - E-mail: info@iame.it - www.iame.it -